

L18 LANTERN
INSTALLATION
INSTRUCTIONS

CAUTION

This type of warning note is used to indicate the possibility of damage to the electrical components within the fixtures.

WARNING

This type of warning note is used to indicate possible fire or electrical shock hazards that may cause serious injuries or death.


IMPORTANT SAFETY INSTRUCTIONS


WARNING

TO REDUCE THE RISK OF FIRE, ELECTRICAL SHOCK, OR INJURY:

- 1 READ this manual before assembling or using your fixture.
- 2 Fixture should be installed by a licensed/qualified electrician.
- 3 This fixture must be wired in accordance with the NATIONAL ELECTRIC CODE and any applicable local codes.
- 4 Use this unit only in the manner intended by the manufacturer.
- 5 Before installing, servicing or repairing, switch off power to fixture and cover exposed wires to avoid risk of fire, shock or DEATH.
- 6 Make sure all wires are securely attached and covered with wire-nuts and/ or wire-clamps.
- 7 Tighten/ secure all fasteners, screws, nuts, clamps, etc.
- 8 Components not completely installed must not left unattended until properly secured in place.

SAVE THESE INSTRUCTIONS


		INSTALLATION DETAILS FOR L18 LANTERN	
<small>THIS PRINT IS THE PROPRIETARY, INTELLECTUAL AND CONFIDENTIAL PROPERTY OF STONEBRIDGE LIGHTING AND MAY NOT BE USED OR REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF STONEBRIDGE LIGHTING. ANY USE HEREOF OR OF ANY INFORMATION CONTAINED HEREIN SHALL BE FOR THE SOLE BENEFIT OF STONEBRIDGE LIGHTING OR ITS AFFILIATES. © 2008 STONEBRIDGE LIGHTING</small>			
DWG. No. L18_SA	DATE: 12/30/2008	DRAWN BY: R. A. M.	APPROVED BY: M. K.
<small>UNLESS NOTED OTHERWISE ALL DIMENSIONS ARE IN INCHES ALL THREADS ARE UNC - 2A/B OR UNF 2A/B</small>			

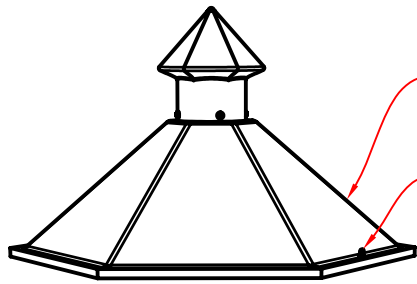


ALIGN HINGES IN ROOF TO HINGES IN THE CAGE AND ATTACH ROOF TO CAGE WITH HARDWARE FOUND IN CAGE HINGES.

SECURE ROOF IN CLOSED POSITION BY REMOVING THUMB SCREW FROM CAGE AND SCREWING IT DOWN, FROM ROOF THROUGH CAGE



BALLAST & BRACKET PROVIDED PRE-ASSEMBLED.
ATTACH TO ROOF WITH (3) 1/4-20 SCREWS, 1/2" LG. (ALREADY ATTACHED IN ROOF)

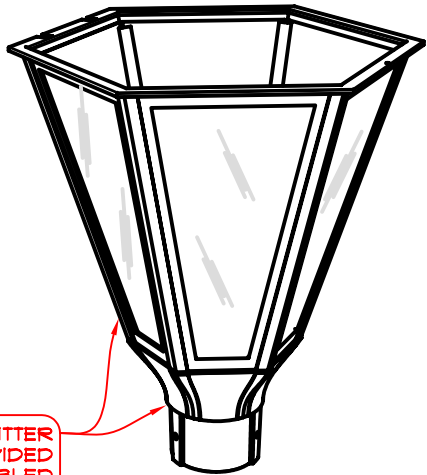

CAGE & FITTER PROVIDED PRE-ASSEMBLED

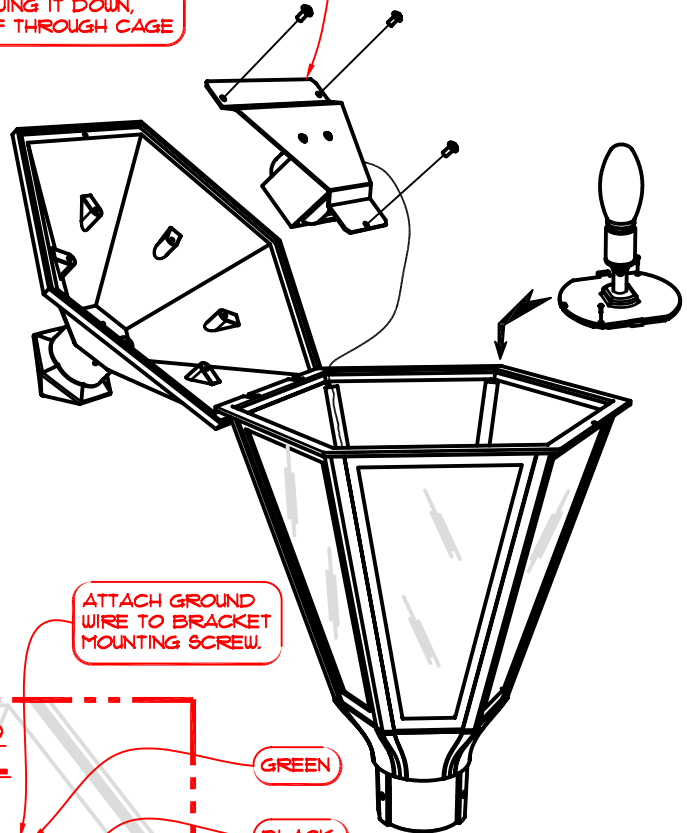


ATTACH GROUND WIRE TO BRACKET MOUNTING SCREW.

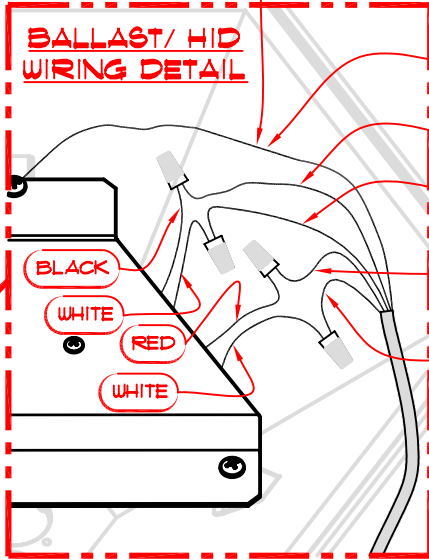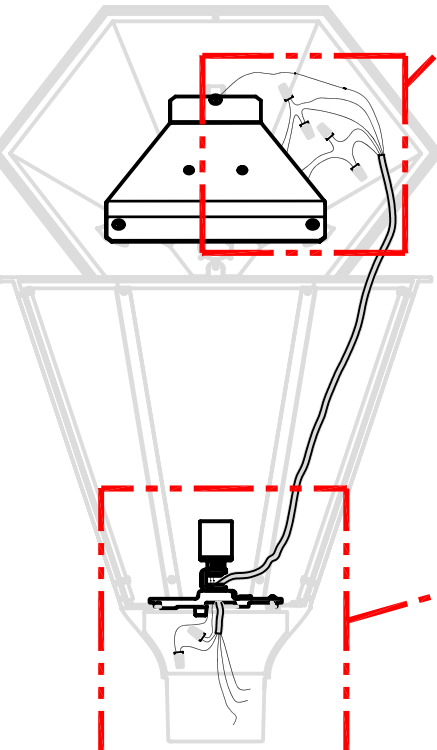


BALLAST/ HID WIRING DETAIL

- GREEN
- BLACK
- WHITE
- RED
- ORANGE

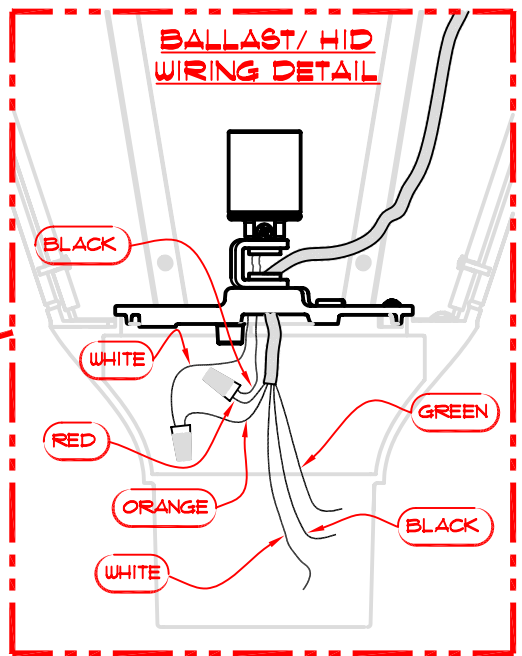

BALLAST/ HID WIRING DETAIL


L18 LANTERN SHOULD BE FASTENED TO POLE WITH (3) 3/8-16 SET-SCREWS, PROVIDED BY STONEBRIDGE.

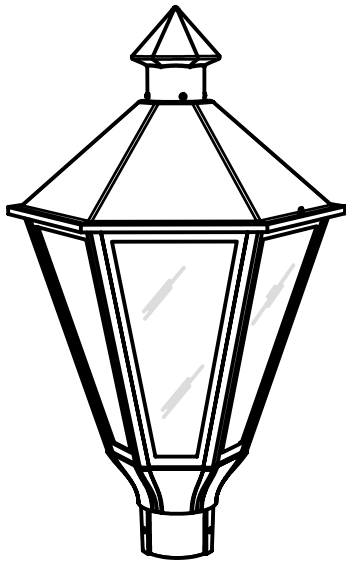


FINAL ASSEMBLY

THE L18 LANTERN BY STONEBRIDGE IS COMPATIBLE WITH ALL 4" ROUND POLES, REGARDLESS OF HEIGHT, STYLE OF BASE OR METHOD OF ANCHORING.

L18 LANTERN IS ALSO AVAILABLE WITH TWIST-LOCK PHOTOCELLS OR TEXTURED ACRYLIC LENSES.

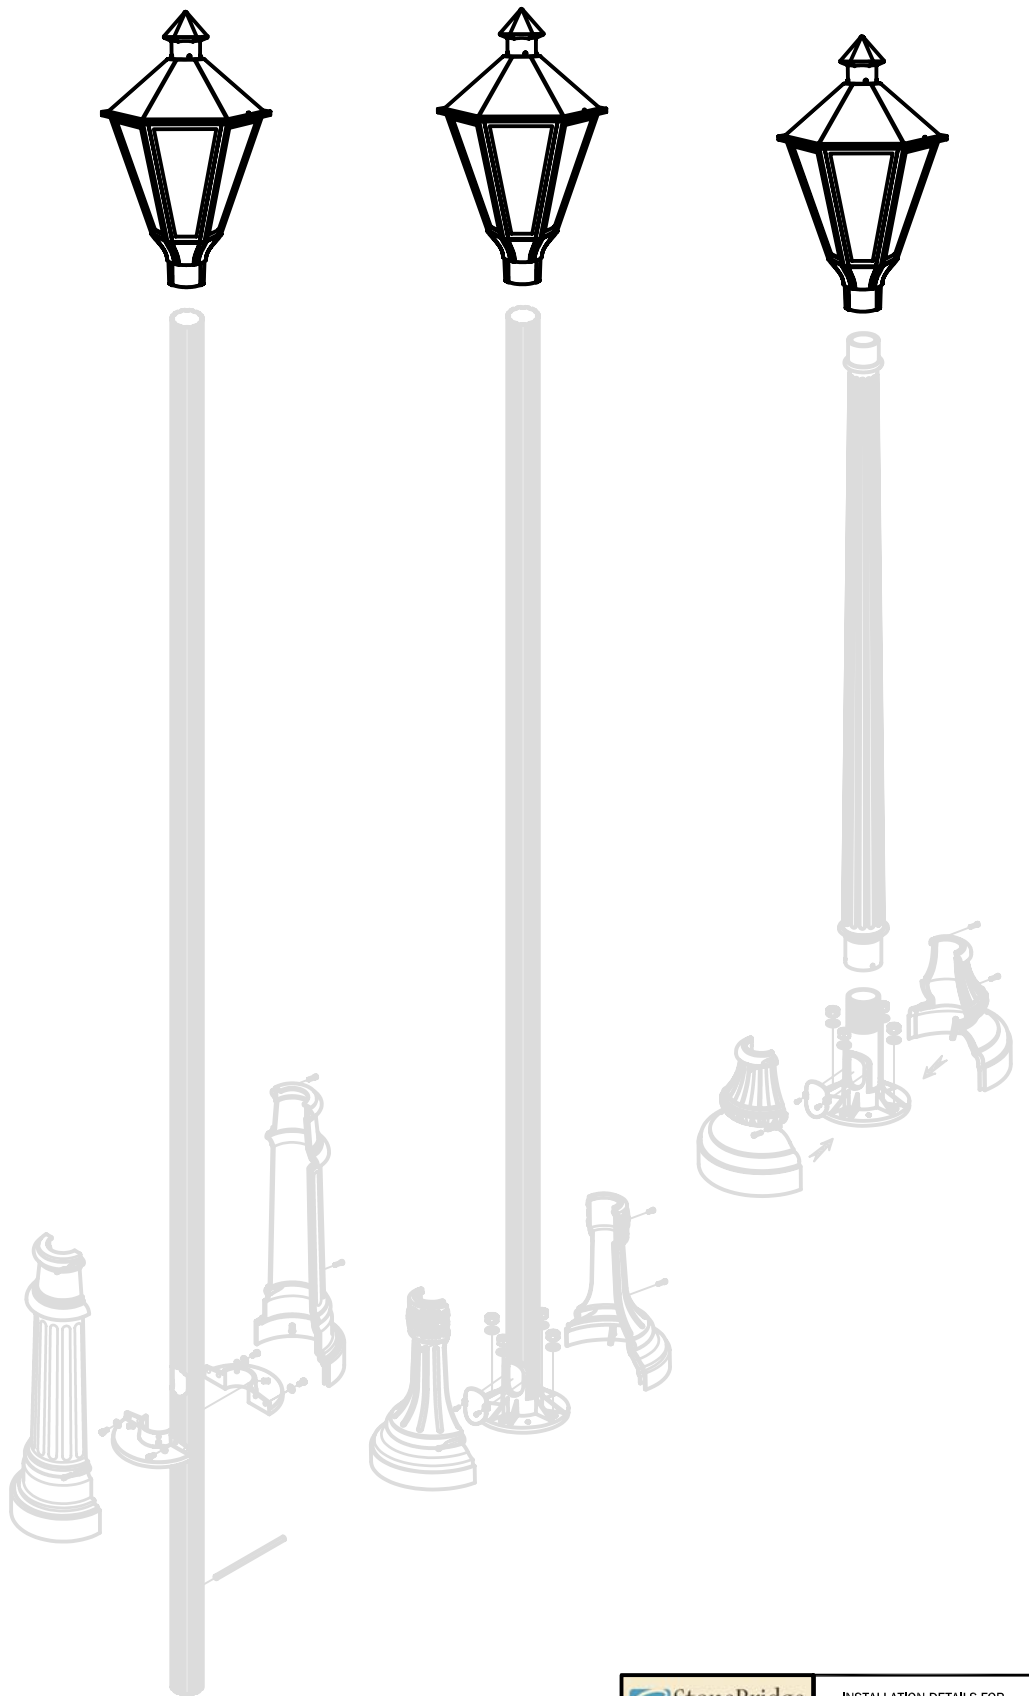

		INSTALLATION DETAILS FOR L18 LANTERN	
<small>THIS PRINT IS THE PROPRIETARY, INTELLECTUAL AND CONFIDENTIAL PROPERTY OF STONEBRIDGE LIGHTING AND MAY NOT BE USED OR REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF STONEBRIDGE LIGHTING. ANY USE HEREOF OR OF ANY INFORMATION CONTAINED HEREIN SHALL BE FOR THE SOLE BENEFIT OF STONEBRIDGE LIGHTING OR ITS AFFILIATES. © 2008 STONEBRIDGE LIGHTING</small>			
DWG. No.	DATE:	DRAWN BY:	APPROVED BY:
L18_SA	12/30/2008	R. A. M.	M. K.
<small>UNLESS NOTED OTHERWISE</small>			
<small>ALL DIMENSIONS ARE IN INCHES ALL THREADS ARE UNC - 2A/B OR UNF 2A/B</small>			