

**L19 LANTERN  
INSTALLATION  
INSTRUCTIONS**

## CAUTION

This type of warning note is used to indicate the possibility of damage to the electrical components within the fixtures.

## WARNING

This type of warning note is used to indicate possible fire or electrical shock hazards that may cause serious injuries or death.

### IMPORTANT SAFETY INSTRUCTIONS

## WARNING

### TO REDUCE THE RISK OF FIRE, ELECTRICAL SHOCK, OR INJURY:

- 1 READ this manual before assembling or using your fixture.
- 2 Fixture should be installed by a licensed/qualified electrician.
- 3 This fixture must be wired in accordance with the NATIONAL ELECTRIC CODE and any applicable local codes.
- 4 Use this unit only in the manner intended by the manufacturer.
- 5 Before installing, servicing or repairing, switch off power to fixture and cover exposed wires to avoid risk of fire, shock or DEATH.
- 6 Make sure all wires are securely attached and covered with wire-nuts and/ or wire-clamps.
- 7 Tighten/ secure all fasteners, screws, nuts, clamps, etc.
- 8 Components not completely installed must not left unattended until properly secured in place.

**SAVE THESE INSTRUCTIONS**



INSTALLATION DETAILS FOR  
L19 LANTERN


THIS PRINT IS THE PROPRIETARY, INTELLECTUAL AND CONFIDENTIAL PROPERTY OF STONEBRIDGE LIGHTING AND MAY NOT BE USED OR REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF STONEBRIDGE LIGHTING. ANY USE HEREOF OR OF ANY INFORMATION CONTAINED HEREIN SHALL BE FOR THE SOLE BENEFIT OF STONEBRIDGE LIGHTING OR ITS AFFILIATES. © 2008 STONEBRIDGE LIGHTING

DWG. No.	DATE	DRAWN BY:	APPROVED BY:
L19_SA	12/30/2008	R. A. M.	M. K.

UNLESS NOTED OTHERWISE

ALL DIMENSIONS ARE IN INCHES  
ALL THREADS ARE UNC - 2A/B OR UNF 2A/B

## TOOLS NEEDED FOR THIS INSTALLATION




PHILLIPS HD. SCREWDRIVER



SET OF ALLEN WRENCHES

## STEP 2: ATTACH ROOF

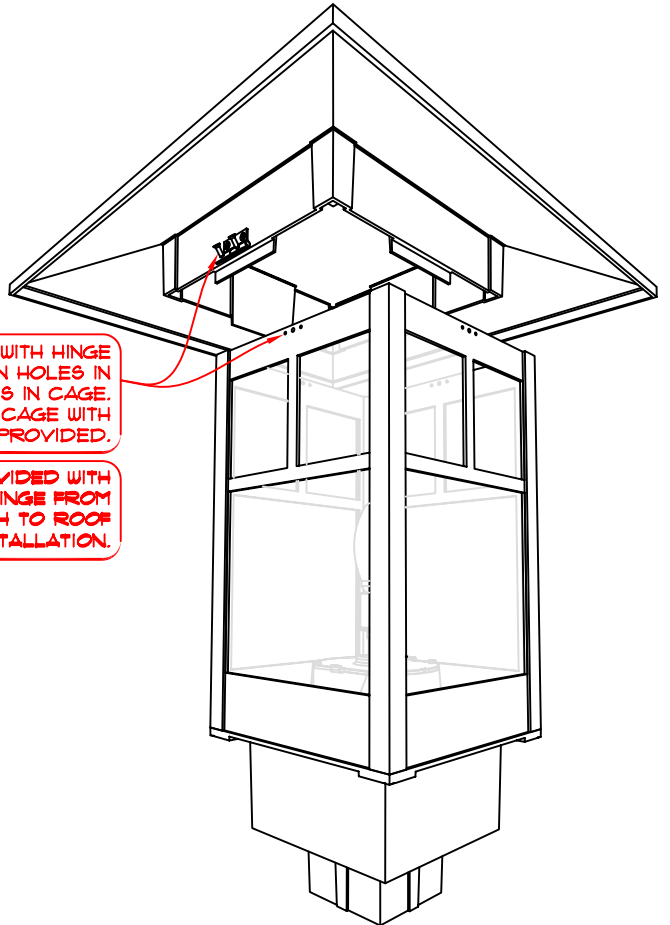


ROOF PROVIDED WITH HINGE IN PLACE. ALIGN HOLES IN HINGE WITH HOLES IN CAGE. FASTEN HINGE TO CAGE WITH (2) #8-32 SCREWS PROVIDED.

IF HINGE IS PROVIDED WITH CAGE, REMOVE HINGE FROM CAGE AND ATTACH TO ROOF FOR EASE OF INSTALLATION.


## STEP 1: INSTALL FITTER CAP TO FIXTURE

FITTER CAP PROVIDED W/ NIPPLE, SOCKET & BALLAST (IF REQ'D) PRE-ASSEMBLED.

FASTEN TO FITTER WITH (2) #8-32 SCREWS, PROVIDED

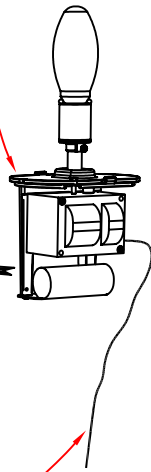


FEED WIRE LEADS THROUGH BASE OF FIXTURE AND FITTER

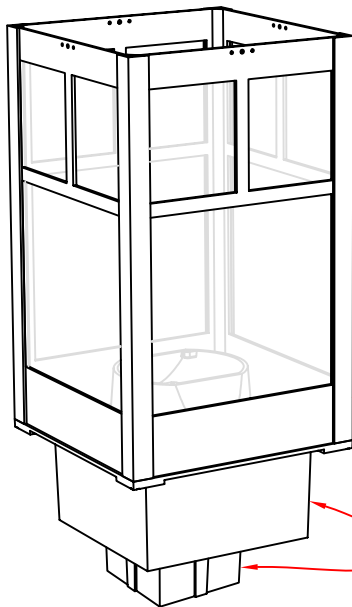

BODY PROVIDED PRE-ASSEMBLED WITH LENSES IN PLACE



## STEP 3: CLOSE & SECURE ROOF

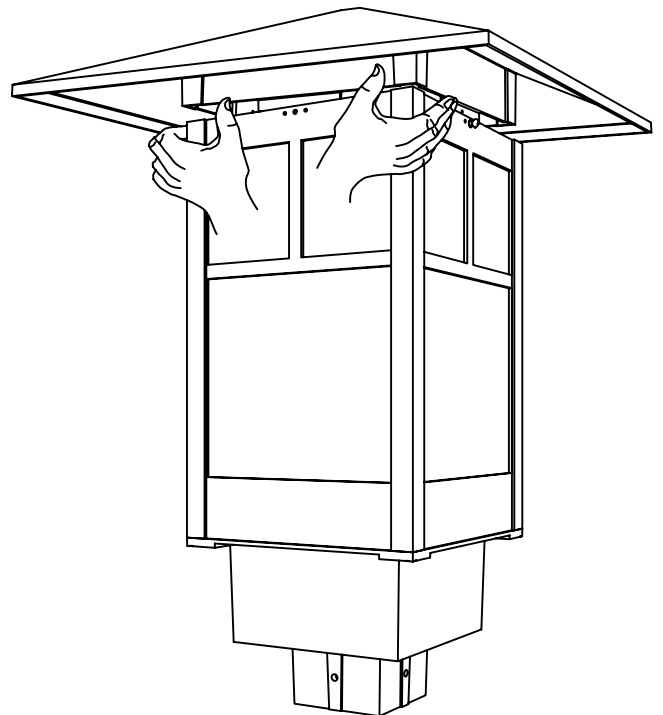


CAREFULLY PLACE ROOF OVER CAGE. THE FIT BETWEEN ROOF AND CAGE WILL BE SNUG. WITH ONE SIDE OF ROOF IN PLACE, PRESS THUMBS AGAINST OPP. SIDE OF ROOF AND SLIDE ROOF DOWN.

CLOSE ROOF COMPLETELY AND SECURE IN-PLACE WITH THUMB SCREW PROVIDED.

**STEP 4: ATTACH LANTERN TO POLE**

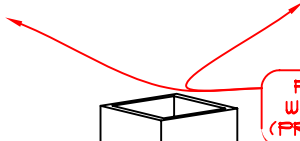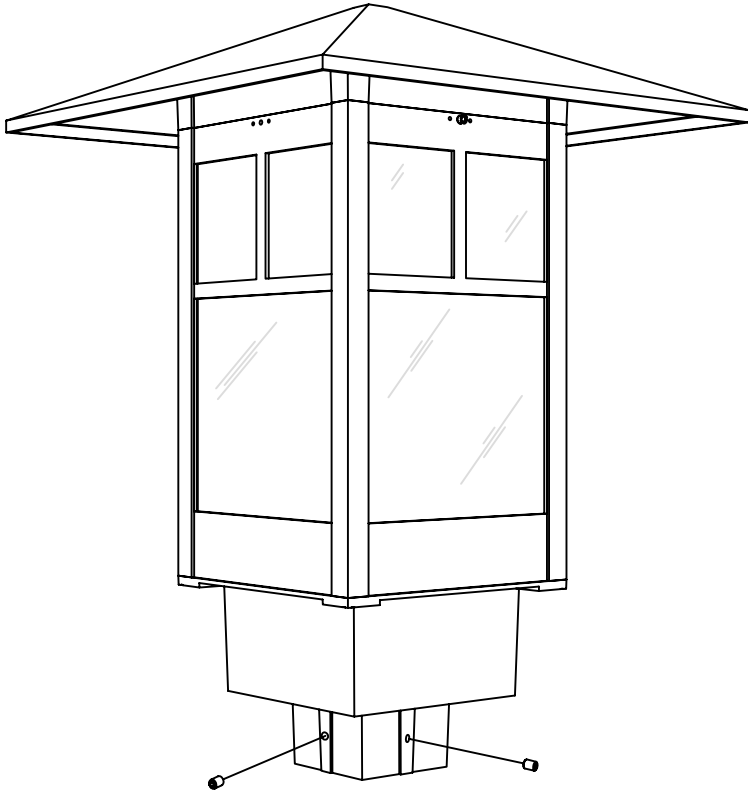

**FASTEN LANTERN TO POLE  
WITH (4) 3/8-16 SET-SCREWS,  
(PROVIDED BY STONEBRIDGE)**

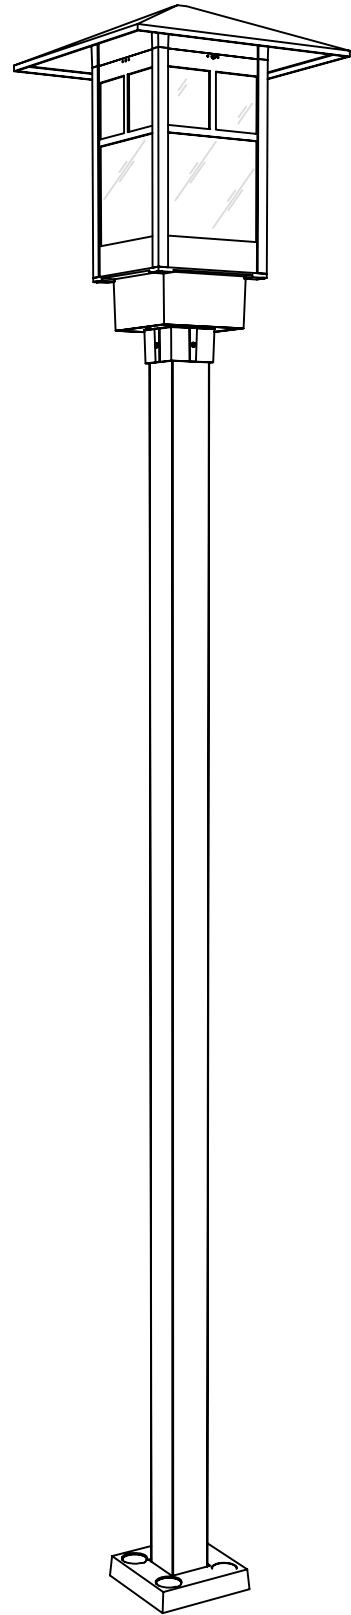

**FINAL ASSEMBLY**

		INSTALLATION DETAILS FOR L19 LANTERN	
<small>THIS PRINT IS THE PROPRIETARY, INTELLECTUAL AND CONFIDENTIAL PROPERTY OF STONEBRIDGE LIGHTING AND MAY NOT BE USED OR REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF STONEBRIDGE LIGHTING. ANY USE HEREOF OR OF ANY INFORMATION CONTAINED HEREIN SHALL BE FOR THE SOLE BENEFIT OF STONEBRIDGE LIGHTING OR ITS AFFILIATES. © 2008 STONEBRIDGE LIGHTING</small>			
DWG. No.	DATE	DRAWN BY:	APPROVED BY:
L19_SA	12/30/2008	R. A. M.	M. K.
<small>UNLESS NOTED OTHERWISE</small>			
<small>ALL DIMENSIONS ARE IN INCHES</small>			
<small>ALL THREADS ARE UNC - 2A/B OR UNF 2A/B</small>			